

F27XP THE SPECIALISTS IN MID-SIZE EXCAVATORS

A mid-size breaker in the large F-series line-up, the F27XP is a brute among hammers. No job is too demanding, from the rigours of runway removal to the reduction of bridge pylons, the F27XP is at home, performing with reliable ease on a daily basis. All the features of the F-series are present in this breaker; a dust intake prevention system, unique greasing system for lubrication of the front head, increased back head pressure and large piston diameter for greater impact energy.

CAPABILITIES


- | | |
|---|--|
| <ul style="list-style-type: none"> • Overburden removal, bench, road & ramp levelling • Boulder reduction in rock piles, • Lightweight concrete, standard concrete • Steel-reinforced concrete, pre-stressed concrete, fibre-reinforced concrete • Asphalt, concrete, composite surfaces • Trenching, pit building, ground excavation • Tunnel driving, roof, face & rib scaling, floor levelling • Boulder reduction in slag heaps | <p>Only with FRD special equipment</p> <ul style="list-style-type: none"> • Roof clearing • Bench levelling • Removing encrustations • Breaking out ladles and molds • Underwater Demolition, Deepening shipping channels |
|---|--|

ATTACHMENTS AND OPTIONS PAGE 57/58




F27XP

SOUND PRESSURE

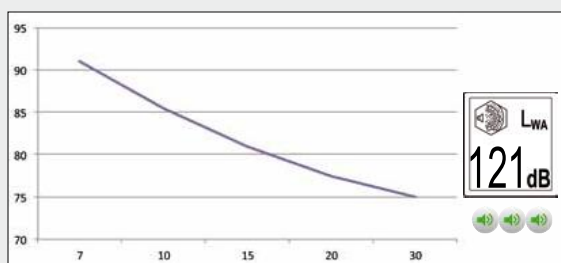

PRODUCTIVITY

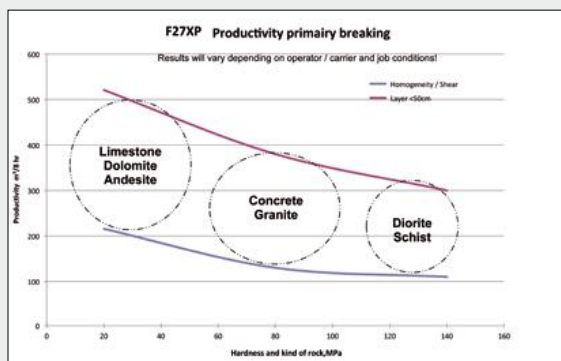

TYPE OF ROD

- Flat rod
- Moil point rod
- Wedge point rod
- Ball point rod



Specifications	F27XP	
Operating weight, ¹⁾ XP	kg	1805
Height with rod,	mm	2455
Operating pressure	min MPa	16
	max	18
Oil flow	min l/min	155
	max	190
Impact rate	min bpm	340
	max	650
Impact energy	max joules	5118
Rod diameter \varnothing	mm	140
Effective length rod	mm	750
Weight rod	kg	145
Hose inner dia \varnothing Press, Return	mm	25
Base machine weight	ton	20 - 30

¹⁾ Operating weight with top bracket, XP Silent Version = Sound and vibration damping
Specifications subject to change without notice



WHERE **EXPERIENCE COUNTS**