

F35XP THE SPECIALISTS IN LARGE-SIZE EXCAVATORS

Designed for excavators in the 25 to 40 ton range, the F35XP is a hard hitting breaker that has no rivals. With years of research behind each hammer, it's no accident the F-series outperforms the competition. It starts from the inside out with a patented dust intake prevention system that keeps critical internal parts free from the damage dirt can cause, and continues with the hydraulic safety valve that actuates when the maximum hydraulic pressure is exceeded. We don't stop there, a larger piston diameter and increase in the back head pressure improves the breaker impact performance. An optional hi-lo speed control actuated from the cab matches the breaker and excavator to the application.

CAPABILITIES


- Secondary breaking
- Primary rock breaking
- Heavyweight concrete
- Steel-reinforced concrete
- Pre-stressed concrete
- Fibre-reinforced concrete
- Trenching
- Pit building
- Ground excavation
- Tunnel driving
- Roof, face & rib scaling
- Floor levelling
- Canal deepening & extension
- Dock deepening & extension
- Ground levelling
- Foundation pile driving

ATTACHMENTS AND OPTIONS PAGE 57/58




F35XP

SOUND PRESSURE

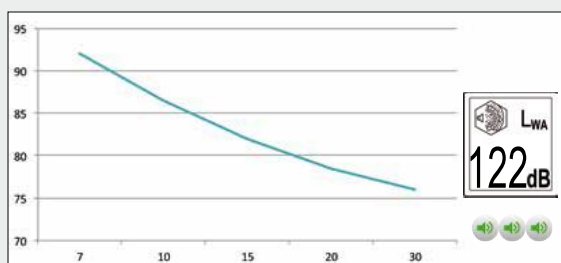

PRODUCTIVITY

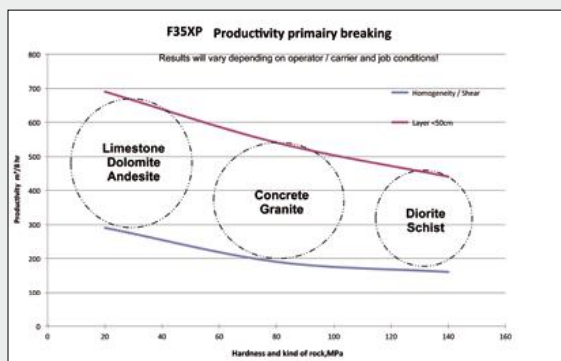

TYPE OF ROD

- Flat rod
- Moil point rod
- Wedge point rod
- Ball point rod



Specifications		F35XP
Operating weight, ¹⁾ XP	kg	2385
Height with rod,	mm	2648
Operating pressure	min MPa	16
	max	18
Oil flow	min l/min	175
	max	220
Impact rate	min bpm	320
	max	600
Impact energy	max joules	6883
Rod diameter Ø	mm	150
Effective length rod	mm	775
Weight rod	kg	150
Hose inner dia Ø Press.Return	mm	25
Base machine weight	ton	25 - 40

¹⁾ Operating weight with top bracket, XP Silent Version – Sound and vibration damping
Specifications subject to change without notice



WHERE **EXPERIENCE COUNTS**