

## F45XP THE SPECIALISTS IN LARGE-SIZE EXCAVATORS

Excavators in the 30-50 ton class are the perfect match for this demolition machine. Whether you're breaking blue granite in Scandinavia or reducing oversize in quarries, the F45XP performs its job quietly and with ease. The unique one-piece enclosure and damper system reduces noise levels for use in noise sensitive environments. A higher back head pressure and larger piston diameter increases impact performance by 20% over previous models. We made greasing easy with a unique lubrication system for the front head and front bushings which improves service of the head and rod. -

### CAPABILITIES


- Secondary breaking
- Primary rock breaking
- Heavyweight concrete
- Steel-reinforced concrete
- Prestressed concrete
- Fibre-reinforced concrete
- Trenching
- Pit building
- Ground excavation
- Tunnel driving
- Roof, face & rib scaling
- Floor levelling
- Canal deepening & extension
- Dock deepening & extension
- Ground levelling
- Foundation pile driving

ATTACHMENTS AND OPTIONS PAGE 57/58




# F45XP

## SOUND PRESSURE

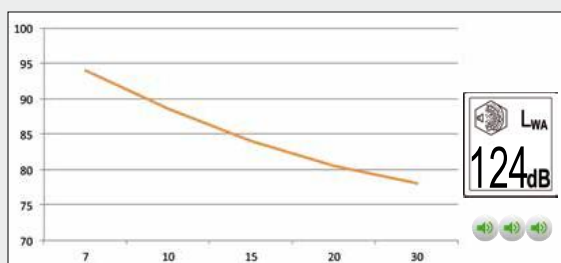

## PRODUCTIVITY

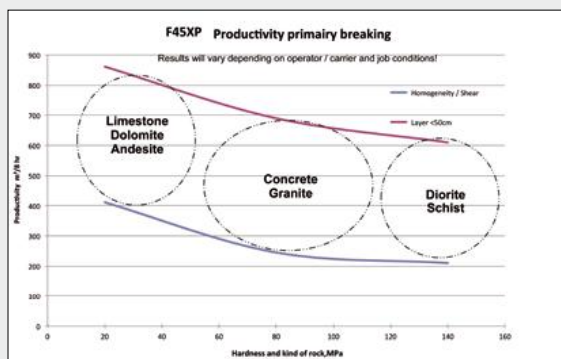

## TYPE OF ROD

- Flat rod
- Moil point rod
- Wedge point rod
- Ball point rod



Specifications		F45XP
Operating weight, <sup>1)</sup> XP	kg	2985
Height with rod,	mm	2850
Operating pressure	min MPa	16
	max	18
Oil flow	min l/min	200
	max	250
Impact rate	min bpm	300
	max	500
Impact energy	max joules	8829
Rod diameter Ø	mm	165
Effective length rod	mm	800
Weight rod	kg	215
Hose inner dia Ø Press. Return	mm	32
Base machine weight	ton	30 - 50

<sup>1)</sup> Operating weight with top bracket, XP Silent Version = Sound and vibration damping  
 Specifications subject to change without notice



WHERE **EXPERIENCE COUNTS**