


F70XP THE SPECIALISTS IN LARGE-SIZE EXCAVATORS

One of the largest of the F-Series, the F70XP is truly designed for use on excavators in the 45-70 ton class. Our patented dust intake prevention system keeps the internal parts of the breaker clean for improved service life. A unique greasing system lubricates both the front head and front bushings for improved service life. Considered the “quiet giant”, the F70XP’s one-piece enclosure reduces noise levels making this breaker a perfect choice for use in noise sensitive environments.

CAPABILITIES


- Secondary breaking
- Primary rock breaking
- Heavyweight concrete
- Steel-reinforced concrete
- Pre-stressed concrete
- Fibre-reinforced concrete
- Trenching
- Pit building
- Ground excavation
- Tunnel driving
- Roof, face & rib scaling
- Floor levelling
- Canal deepening & extension
- Dock deepening & extension
- Ground levelling
- Foundation pile driving

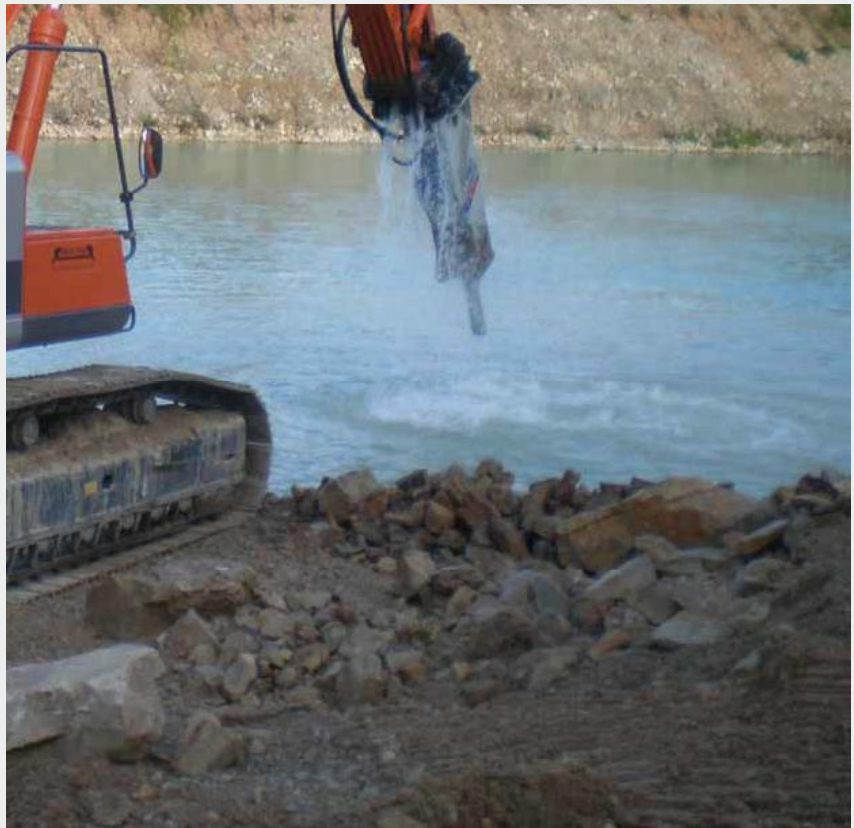


ATTACHMENTS AND OPTIONS PAGE 57/58

F70XP

SOUND PRESSURE

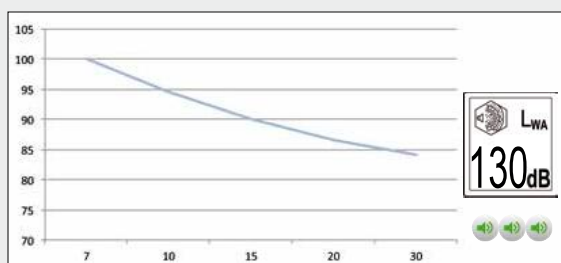

PRODUCTIVITY

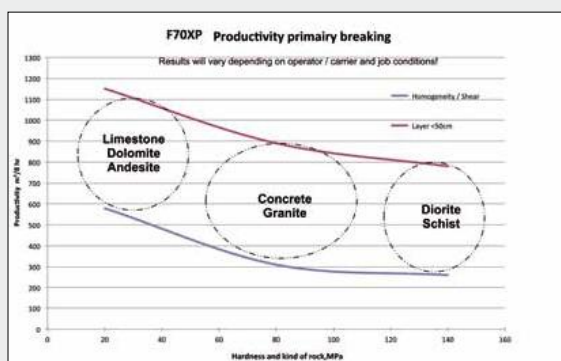

TYPE OF ROD

- Flat rod
- Moil point rod
- Wedge point rod
- Ball point rod



Specifications	F70XP
Operating weight, ¹⁾ XP	kg 4315
Height with rod,	mm 3235
Operating pressure	min MPa 16
	max 18
Oil flow	min l/min 250
	max 340
Impact rate	min bpm 250
	max 500
Impact energy	max joules 13667
Rod diameter Ø	mm 180
Effective length rod	mm 860
Weight rod	kg 270
Hose inner dia Ø Press. Return	mm 32
Base machine weight	ton 45 - 70

¹⁾ Operating weight with top bracket, XP Silent Version = Sound and vibration damping

Specifications subject to change without notice



WHERE **EXPERIENCE COUNTS**